扫描二维码
关注康力电梯门户网站
Scan the QR code and pay attention to
CANNY ELEVATOR Portal Website.

扫描二维码
关注康力电梯微信公众号
Scan the QR code and pay attention to
CANNY ELEVATOR WeChat Public Number

扫描二维码
查看康力分公司地址
Scan the QR code and pay attention to
Check the address of CANNY branch

康力电梯股份有限公司
CANNY ELEVATOR CO.,LTD.

◎地址：江苏省汾湖高新技术产业开发区康力大道888号
◎电话：0512-63290000
◎传真：0512-63293938
◎网址：www.canny-elevator.com
◎电子信箱：(国内) sales@canny-elevator.com
(国外) export-canny@163.com
export@canny-elevator.com
◎400客户服务热线：400-188-2367
◎邮编：215213

◎Add: No.888, Kangli Road, FOHO New & Hi-Tech Industrial Development Zone, Jiangsu Province, China.
◎Tel: +86-512-63290000 63297851
◎Fax: +86-512-63299709
◎URL: www.canny-elevator.com
◎E-mail: export-canny@163.com
export@canny-elevator.com
◎P.C: 215213

本书为一般信息类出版物，我们保留随时更改产品设计和说明的权利，所有图片和颜色可能与实物有所不同，请以实物为准 。
康力电梯股份有限公司© 版权所有 2022-V1.0版



KLK1
银燕系列乘客电梯
KLK1 Passenger elevator



以人为本 从心出发

Being People-oriented, Starting from The Heart

以人为本，融汇现代科技之灵性，

采用最新电梯制造技术，

成就了电梯的高实用性和高性价比，

可全面满足建筑不同尺度、不同个性的空间需求和生活主张。

Being people-oriented, it adopts intelligent modern technology,


Uses the latest elevator manufacturing technology,

Achieves high availability and high cost-efficiency of elevator,

Can fully meet various space requirements of buildings at different scales and different lifestyles.




康力银燕系列乘客电梯

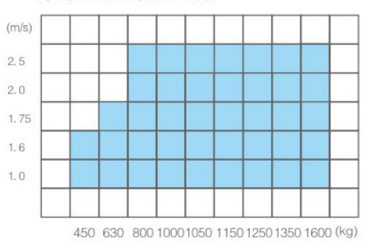

人性空间·至善至美


User-friendly Space, Pursuit of Perfection

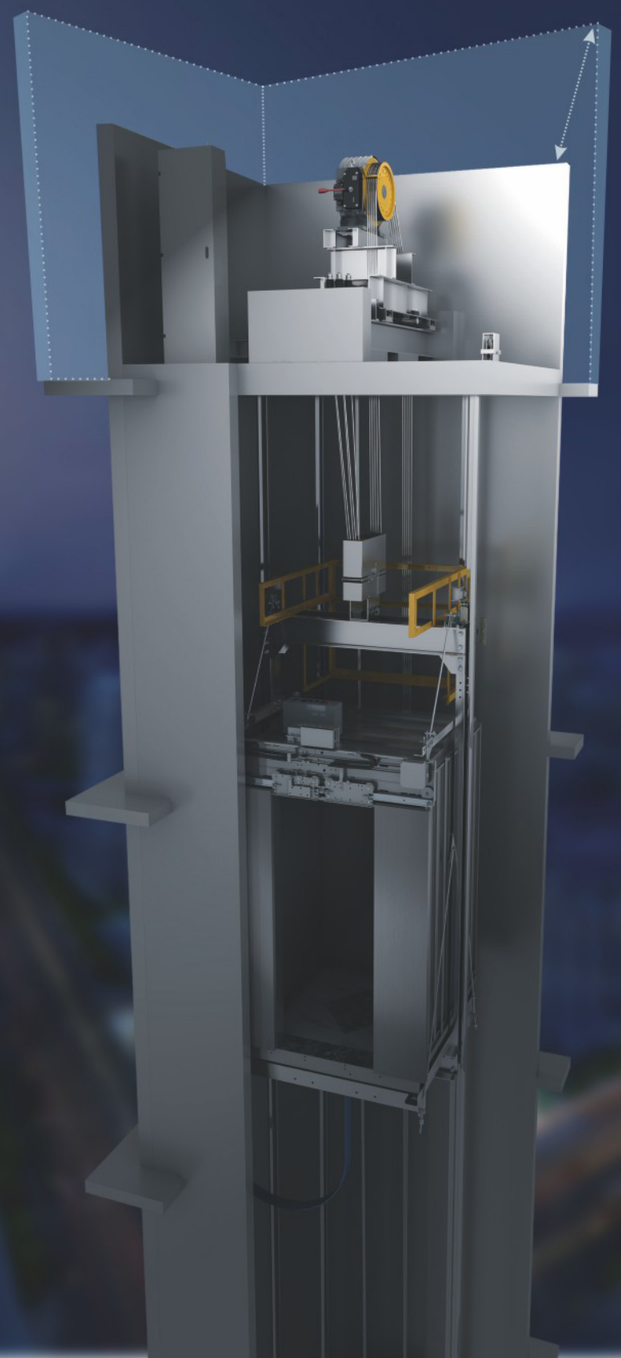

机房空间减少



Reduced by 25%



普通电梯的机房
Machine room in the ordinary lift

小机房电梯的机房
Machine room in small machine room lift

建筑设计更自由
节省空间
提高建筑利用率
维修更方便、安全

More Free Architectural Design
Saving Space
Improving the utilization of buildings
Making maintenance much easier and safe

新一代永磁同步无齿轮曳引机

- 高精度密封轴承，转矩更大，效率更高
- 同轴传动技术，节能达30%以上
- 无需更换润滑油，减少油污污染
- 消除了传统传动引起的噪音和振动，安静平稳

30% 节省能源

安静平稳

A new generation of permanent magnet synchronous gearless traction machine

High precision sealed bearing, with greater torque and higher efficiency.
Technology, which saves more than 30% of energies. Coaxial transmission
No need to replace the lubricant, which reduces oil contamination.
Eliminate the noise and vibration caused by traditional transmission, which helps realize quietness and smoothness.

节省空间

采用康力量身定制的紧凑型控制柜和永磁同步曳引机，
有效节省机房空间，提高建筑空间利用率。

节能低耗

LED灯使用寿命长，耗电量少，灯光更柔和，电能只为白炽灯的五分之一。

自动唤醒


当固定时间内无人唤梯时，轿厢内照明及风扇将自动关闭，
当有乘客召唤时，设备将自动启动，节省电梯非运行时间耗费的能源。



Space Saving
The adoption of the compact control cabinet and the permanent magnet synchronous traction machine customized for CANNY saves the space of the hoistway and improves the utilization of the construction space.

Energy Saving and Low Consumption
The LED light has the advantages of long service life, and low energy cost with softer lighting; besides, the electricity consumed is just one fifth of that consumed by incandescent light bulb.

Automatic waking device
When nobody calls for the elevator in a fixed time period, the light and the fan in the car will automatically shut off; When someone calls, the device will automatically start, saving energy during the standing time.

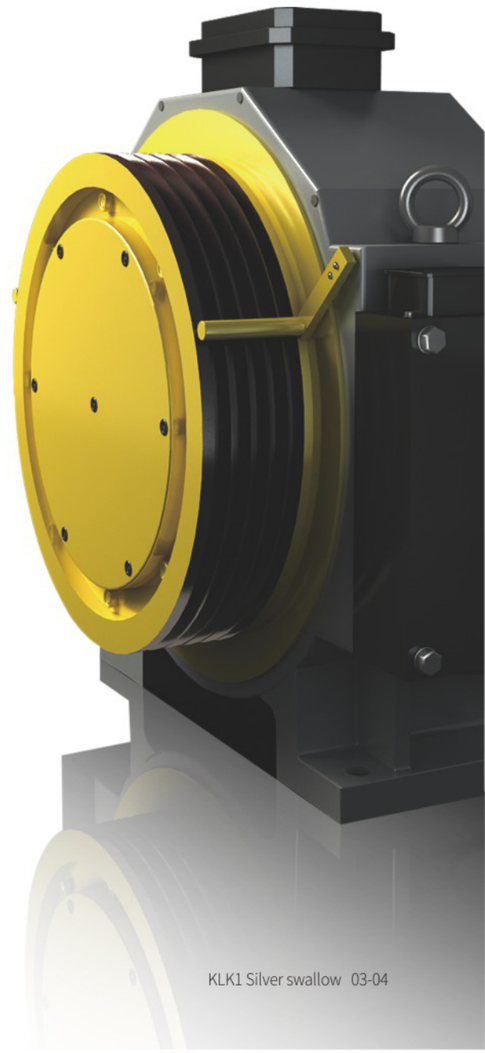

领先升级·全新一代控制系统
New generation of control system, Leading upgrade

- 双32位高性能ARM芯片，可实现容错和监测功能，提高了系统的可靠性；
- 采用四层板表贴工艺，CAN总线串行通讯，保证了大量数据的高速、可靠传送；
- 超强的故障自诊与记录功能，确保电梯效率和安全；
- 采用分级密码进行参数设置，安全可靠，还可故障记录查询等操作，便于维修与调试。

Double 32-bit high-performance ARM chip can achieve fault tolerance and monitoring function, improving the reliability of the system.
Four-layer board surface mount technology and CAN bus serial communication are adopted to ensure the high-speed, reliable transmission of mass data;
Super fault-diagnosis and fault recording function ensure the efficiency and safety of elevator;
Grading password is adopted for parameter setting, it is safe and reliable, and can inquire fault records, making maintenance and commissioning much easier.




人性科技·创享安全
User-friendly • safe and reliable

- **抱闸力自检测及监视功能**

主动定期测试抱闸力，通过提示故障及禁止电梯运行等方式，防止严重事故发生。

- **曳引绳滑动检测**

实时监测滑动数据并且根据需要自动进入应急减速的安全运行模式。

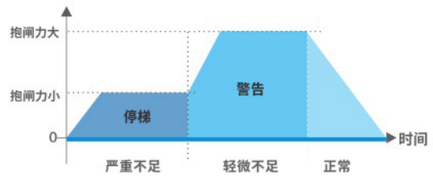

Braking Force Self-Detecting and Monitoring Function
It can test the braking force regularly, and prevent serious accidents from happening by prompting failure and stopping elevator from running.
Traction Rope Slide Detection
It provides real-time monitoring of sliding data, and can automatically enter the safe operation mode for emergency according to requirements.

人性关怀·平稳舒适
User-friendly • Smooth and Comfortable

- **永磁变频门机系统**

采用永磁控制技术，闭环控制，传动平稳，结构紧凑。具备高效自学能力的负载检测器，开关门速度自由调节，使系统运行舒适平稳。

- **新一代VVVF变频器**

可根据轿厢负载，调整电流大小和相位，精确控制主机转动力矩，确保电梯稳定运行。

Frequency conversion door system
Equipped with effective door load detector capable of self-learning, the speed of door opening and closing can be freely adjusted, making the whole system run comfortably and smoothly.
New generation of VVVF Inverter
Capable of the adjustment of current magnitude and phase and the precise control of driving torque of main engine, so as to ensure the stable running of elevator.




尊崇之道·随心而选
Intelligent Technology, Choice of Heart

IC卡智能管理系统(可选)

轿厢内IC卡智能设置系统: 采用IC卡智能识别系统，
乘客进入轿厢内便可实现刷卡到户的快捷之旅。
IC card intelligent management (Optional)
Therenewableenergyintoelectricalenergybacktothelocalpowergriduse, energyconsumptionisreducedby30%.


1.呼梯　　2.入口楼层读取
3.进入轿厢　4.轿内选择权限楼层
可选择任一平层，无需按钮自动到达所住楼层

1. call　2. Read card at entrance floor
3.Select the floor of the car　4. Enter the elevator car
Each floor can be selected for leveling, without pressing any button,it will auomatically reach the desiginated floor of user.

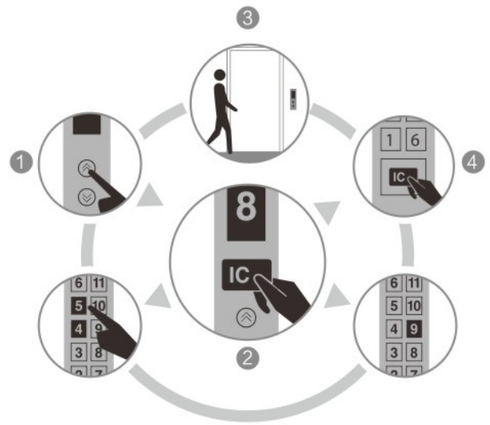


群控智能派梯系统(可选)

运用智能分散待梯原则，以最快速度、最高效率运载乘客。
Group controlling intelligent dispatching system (Optional)
Abiding by the principle of intelligent dispersed principle, carry passengers withhighestspeedandefficiency

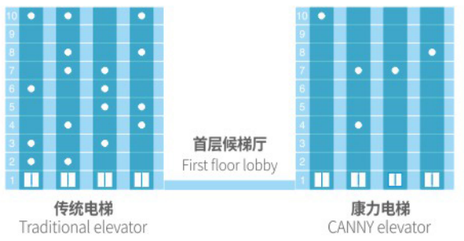

“赛能”能量回馈再生技术(可选)

将再生能源转化成电能回馈给局域电网使用，能耗降低30%。
CANEN energy re-generation feedback technology (optional)
Therenewableenergyintoelectricalenergybacktothelocalpowergriduse, energyconsumptionisreducedby30%.

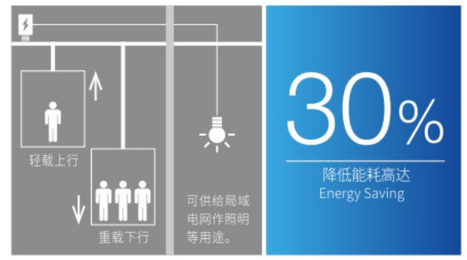

更多可选功能
More optional function



远程监控
Long-distance monitor

提前开门功能
Door opening in advance

BAS楼宇监控
Building Automation System

防捣乱功能
Anti-nuisance

标准型设计
Standard Design

KL/K7-2006R 标配 Standard configuration

轿壁:发纹不锈钢　前壁:发纹不锈钢
操纵箱:KL513-4C旋转一体式操纵箱,发纹不锈钢
轿门:发纹不锈钢　地板:KL/JD-2004(PVC)



Car wall: hairline stainless steel　Front wall: hairline stainless steel
Operation panel: KL513-4C , rotate hairline stainless steel
Car door: hairline stainless steel　Floor: KL / JD-2004 (PVC)　Skirting: hairline stainless steel

吊顶
Ceiling

KL/DD-1005
发纹不锈钢
更环保,更节能

Hairline stainless steel
Environmental protection, energy-saving

轿门
Car door

发纹不锈钢
Hairline stainless steel

扫描二维码360度了解轿厢
San the QR code to know more about the lift car in the 360-degree manner



时尚节能
舒适温馨的同时享受不同的空间体验

Fashionable and Energy-saving
Comfortable and Providing different spatial experiences

细节考究
整体式不锈钢包边,干净、整洁、易维护

Exquisite Details
The integrated stainless steel tipping, clean, tide and easy for maintenance.




完美配置
与高品质面板完美组合,整个轿厢清新素雅,气质内敛。

Perfect configuration
It matches perfectly withhigh-quality panel, making the entire car fresh and elegant, with restrained temperament.



美观实用
具有较强的耐磨性质,防滑、防潮易保养

Beautiful and Practical
It has strong wear resistance properties, it is anti-skidding, moisture-proof and easy for maintenance

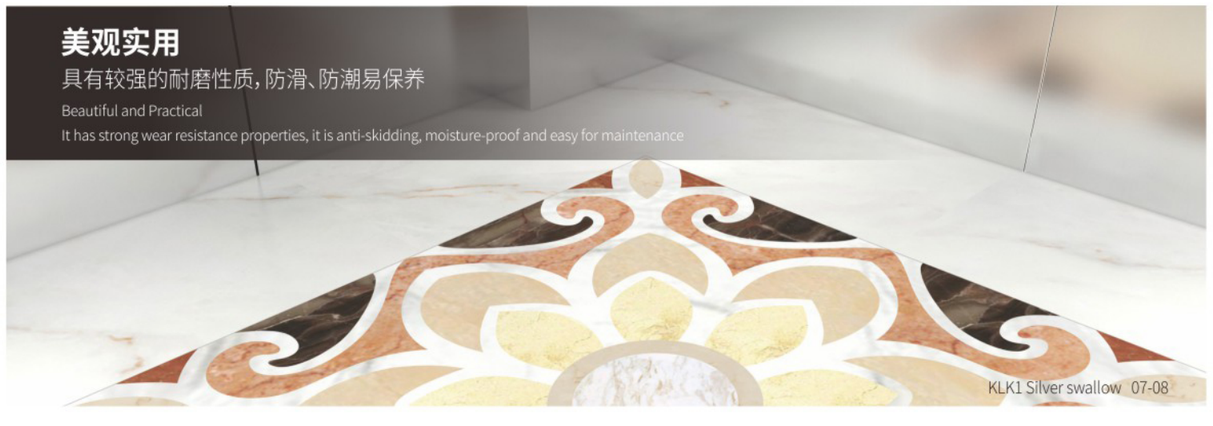

选配型设计
Optional Design




KL/K7-2007R
选配 Optional configuration

吊顶:KL/DD-1004，发纹不锈钢
轿壁:后壁中间镜面蚀刻，其他发纹不锈钢
前壁:发纹不锈钢
地板:KL/JD-2004 (PVC)
轿门:发纹不锈钢
操纵箱:KL513-4C旋转一体式操纵箱，发纹不锈钢

Ceiling: KL / DD-1004, hairline stainless steel
Car wall: The middle wall of the middle mirror etching, the other hairline stainless steel
Front wall: Hairline stainless steel
Floor: KL / JD-2004 (PVC)
Car door: Hairline stainless steel
Operation panel: KL513-4C rotate integrated operation panel, hairline stainless steel

扫描二维码360度了解轿厢
San the QR code to know more about the lift car in the 360-degree manner

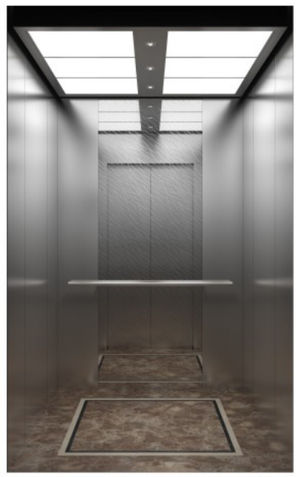

KL/K7-2008R
选配 Optional configuration

吊顶:KL/DD-2008，发纹不锈钢
轿壁:后壁中间镜面蚀刻，其他发纹不锈钢
前壁:发纹不锈钢
操纵箱:KL513-4C旋转一体式操纵箱，发纹不锈钢
轿门:发纹不锈钢
地板:KL/JD-3167(PVC)
扶手:圆管

Ceiling: KL / DD-2008, hairline stainless steel
Car wall: The middle wall of the middle mirror etching, the other hairline stainless steel
Front wall: Hairline stainless steel
Operation panel: KL513-4C rotate integrated operation panel, hairline stainless steel
Car door: Hairline stainless steel
Floor: KL / JD-3167 (PVC)
Handrail: Round tube

扫描二维码360度了解轿厢
San the QR code to know more about the lift car in the 360-degree manner




KL/K4-2001R
选配 Optional configuration

吊顶:KL/DD-4004，喷粉钢板，中撑小圆孔，LED光源
轿壁:发纹不锈钢
前壁:发纹不锈钢
操纵箱:KL513-4C旋转一体式操纵箱，发纹不锈钢
轿门:发纹不锈钢
地板:KL/JD-4004 (PVC)

Ceiling: KL/DD-4004, Dusting steel plate, hole on center support,
LED light source
Car wall: Hairline stainless steel
Front wall: Hairline stainless steel
Operation panel: KL513-4C rotate integrated operation panel, hairline stainless steel
Car door: Hairline stainless steel
Floor: KL/JD-4004 (PVC)

扫描二维码360度了解轿厢
San the QR code to know more about the lift car in the 360-degree manner

深轿厢设计
Deep Car Decoration

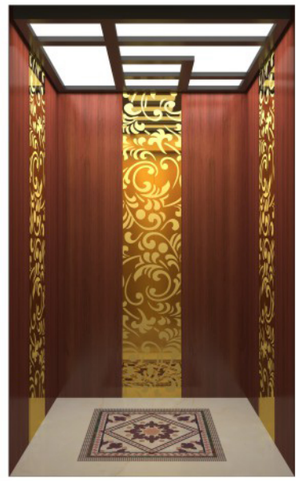


KL/K4-2002R
选配 Optional configuration

吊顶:KL/DD-4005，喷粉钢板，亚克力，LED光源
轿壁:钛金镜面蚀刻（中间），贴塑钢板（两侧）
前壁:钛金发纹不锈钢
操纵箱:KL513-4C旋转一体式操纵箱，钛金发纹不锈钢
地坪:KL/JD-4005(PVC)
轿门:钛金发纹不锈钢

Ceiling: KL/DD-4005, Dusting steel plate, acrylic, LED light source
Car wall: Titanium gold mirror etched (Middle)
Model steel placed (Both side)
Front wall: Titanium gold hairline stainless steel
Operation panel: KL513-4C rotate integrated operation panel, mirror stainless steel
Floor: KL/JD-4005 (PVC)
Car door: Titanium gold hairline stainless steel

扫描二维码360度了解轿厢
San the QR code to know more about the lift car in the 360-degree manner

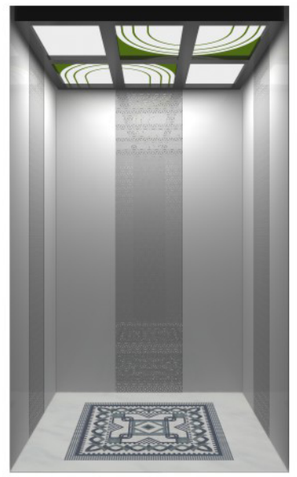

KL/K4-2003R
选配 Optional configuration

吊顶:KL/DD-4006，喷粉钢板，亚克力，LED光源
轿壁:镜面蚀刻(中间) 贴塑钢板(两侧)
前壁:镜面不锈钢
操纵箱:KL513-4C旋转一体式操纵箱，镜面不锈钢
轿门:镜面不锈钢
地坪:KL/JD-4006(PVC)

Ceiling: KL/DD-4006, Dusting steel plate, acrylic, LED light source
Car wall: Mirror etched (Middle)
Model steel placed (Both side)
Front wall: Mirror stainless steel
Operation panel: KL513-4C rotate integrated operation panel, mirror stainless steel
Car door: Mirror stainless steel
Floor: KL/JD-4006 (PVC)

扫描二维码360度了解轿厢
San the QR code to know more about the lift car in the 360-degree manner



KL/K7-2006R-3
(深轿厢标准配置 Standard configuration)


吊顶:KL/DD-1005，发纹不锈钢
轿壁/前壁:发纹不锈钢
地板:KL/JD-2004 (PVC)
轿门:发纹不锈钢
操纵箱:KL233-4C壁挂一体式操纵箱，发纹不锈钢

Ceiling: KL / DD-1005, hairline stainless steel
Car wall/Front wall: Hairline stainless steel
Floor: KL / JD-2004 (PVC)
Car door: Hairline stainless steel
Operation panel: KL233-4C wall hanging integrated operation panel, hairline stainless steel

扫描二维码360度了解轿厢
San the QR code to know more about the lift car in the 360-degree manner

旋转一体式操纵箱 Rotary integrated control cabinet
（仅适用于前壁，侧壁不适用） (Only for front wall, not side wall)

KL513-4C

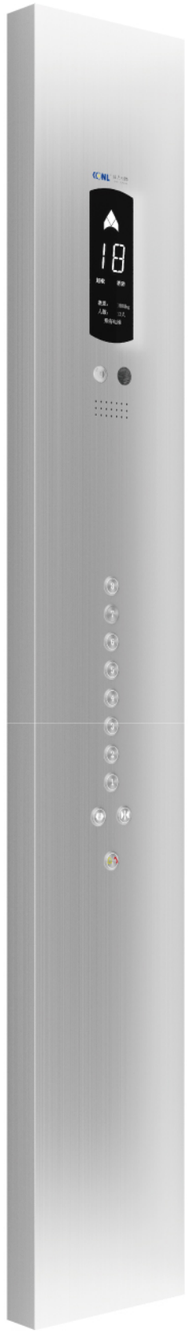

面板材质（需勾选）**Panel material** (to be selected)	发纹不锈钢 Hairline stainless steel	镜面不锈钢 Mirror stainless steel
按钮 Button	圆 / 方形微行程按钮 Round / square micro stroke button	
显示屏 Display screen	LED段码 / 点阵 / 液晶显示屏 LED segment code / dot matrix / LCD	
停层数 Parking number	2-60停层 2-60 stop layer	

可选显示 Display optional

		可选按钮 Button optional	KL513-4C	KL514-4C
LED段码 LED segment code		发纹不锈钢 Hairline stainless steel	标配 Standard	无偿选配 Free optional
		镜面不锈钢 Mirror stainless steel	有偿选配 Charged optional	有偿选配 Charged optional
白色点阵 White dot matrix			KL511-1C 有偿选配 Charged optional	KL512-1C 有偿选配 Charged optional
红色点阵 Red dot matrix			KL511C 有偿选配 Charged optional	KL512C 有偿选配 Charged optional
液晶显示 LCD			KL513-3C 有偿选配 Charged optional	KL514-3C 有偿选配 Charged optional
TFT液晶（图片机 / 视频机） TFT liquid crystal (picture machine / video machine) （7寸 / 8寸 / 10.4寸可选） (7 inch / 8 inch / 10.4 inch optional)			KL517C 有偿选配 Charged optional	KL518C 有偿选配 Charged optional

壁挂一体式操纵箱 Wall-mounted integrated control cabinet
（适用于前壁、侧壁） (Apply to front wall and side wall)

KL233-4C




面板材质 Panel material	发纹不锈钢 Hairline stainless steel	镜面不锈钢 Mirror stainless steel
按钮 Button	圆 / 方形微行程按钮 Round / square micro stroke button	
显示屏 Display screen	LED段码 / 点阵 / 液晶显示屏 LED segment code / dot matrix / LCD	
停层数 Parking number	2-48停层 2-48 stop layer	

可选显示 Display optional

		可选按钮 Button optional	KL233-4C	KL234-4C
LED段码 LED segment code		发纹不锈钢 Hairline stainless steel	标配 Standard	无偿选配 Free optional
		镜面不锈钢 Mirror stainless steel	KL243-4C 有偿选配 Charged optional	KL244-4C 有偿选配 Charged optional
白色点阵 White dot matrix		发纹不锈钢 Hairline stainless steel	KL231-1C 有偿选配 Charged optional	KL232-1C 有偿选配 Charged optional
		镜面不锈钢 Mirror stainless steel	KL241-1C 有偿选配 Charged optional	KL242-1C 有偿选配 Charged optional
红色点阵 Red dot matrix		发纹不锈钢 Hairline stainless steel	KL231C 有偿选配 Charged optional	KL232C 有偿选配 Charged optional
		镜面不锈钢 Mirror stainless steel	KL241C 有偿选配 Charged optional	KL242C 有偿选配 Charged optional
液晶显示 LCD		发纹不锈钢 Hairline stainless steel	KL233-3C 有偿选配 Charged optional	KL234-3C 有偿选配 Charged optional
		镜面不锈钢 Mirror stainless steel	KL243-3C 有偿选配 Charged optional	KL244-3C 有偿选配 Charged optional

壁挂一体式操纵箱 Wall-mounted integrated control cabinet

（适用于前壁、侧壁）(Apply to front wall and side wall)

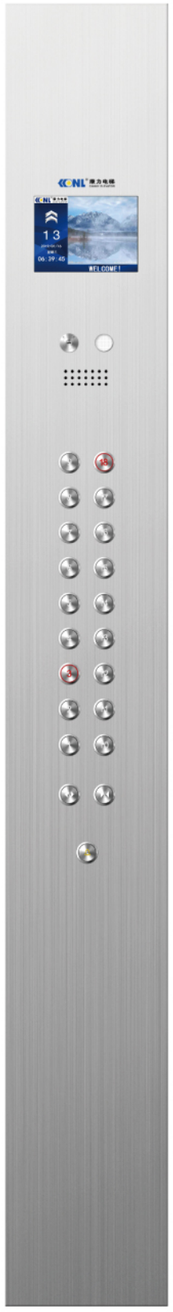

显示屏 Display screen	多媒体显示屏 Multimedia display screen
停层数 Parking number	2-48停层 2-48 stop layer



面板材质（发纹不锈钢）
Panel material (Hairline stainless steel)

可选按钮 Button optional

可选屏幕尺寸 Optional screen size



7.0"	8.0"	10.4"
KL235C 有偿选配 Charged optional	**KL237C-A** 有偿选配 Charged optional	**KL239C** 有偿选配 Charged optional



KL236C 有偿选配 Charged optional	**KL238C-A** 有偿选配 Charged optional	**KL23AC** 有偿选配 Charged optional



面板材质（镜面不锈钢）
Panel material (Mirror stainless steel)

可选按钮 Button optional

可选屏幕尺寸 Optional screen size



7.0"	8.0"	10.4"
KL245C 有偿选配 Charged optional	**KL247C-A** 有偿选配 Charged optional	**KL249C** 有偿选配 Charged optional



KL246C 有偿选配 Charged optional	**KL248C-A** 有偿选配 Charged optional	**KL24AC** 有偿选配 Charged optional

嵌入式操纵箱 Embedded operation panel

KL1113-4C



面板材质 Panel material	发纹不锈钢 Hairline stainless steel
按钮 Button	圆 / 方形微行程按钮 Round / square micro stroke button
显示屏 Display screen	LED段码 / 点阵 / 液晶显示屏 LED segment code / dot matrix / LCD
停层数 Parking number	2-30停层 2-30 stop layer

可选显示 Display optional	**可选按钮** Button optional		
LED段码 LED segment code		**KL1113-4C** 无偿选配 Free optional	**KL1114-4C** 无偿选配 Free optional
白色点阵 White dot matrix		**KL1111-1C** 无偿选配 Free optional	**KL1112-1C** 无偿选配 Free optional
红色点阵 Red dot matrix		**KL1111C** 无偿选配 Free optional	**KL1112C** 无偿选配 Free optional
液晶显示 LCD		**KL1113-3C** 无偿选配 Free optional	**KL1114- 3C** 无偿选配 Free optional

人机界面 Man-machine interface

无底盒召唤指示器 Calling indicator without bottom box

KL1201-1H
标配
Standard



段码显示
Segment code display

KL1201-2H
无偿选配
Free optional



点阵显示
Dot matrix display

KL1201-3H
无偿选配
Free optional



点阵显示
Dot matrix display

KL1203-1H
有偿选配
Charged optional



段码显示
Segment code display

KL1203-2H
有偿选配
Charged optional



点阵显示
Dot matrix display

KL1203-3H
有偿选配
Charged optional



点阵显示
Dot matrix display

面板材质
Panel material
抗指纹磨砂不锈钢
Anti-fingerprint frosted stainless steel

KLF411H
有偿选配
Charged optional



点阵显示
Dot matrix display

KLF415-1H
有偿选配
Charged optional



液晶显示
LCD

KLF415H
有偿选配
Charged optional



液晶显示
LCD

KLF413H
有偿选配
Charged optional

KLF417-1H
有偿选配
Charged optional


KLF417H
有偿选配
Charged optional

KLF412H
有偿选配
Charged optional



点阵显示
Dot matrix display

KLF416-1H
有偿选配
Charged optional



液晶显示
LCD

KLF416H
有偿选配
Charged optional



液晶显示
LCD

KLF414H
有偿选配
Charged optional

KLF418-1H
有偿选配
Charged optional

KLF418H
有偿选配
Charged optional

面板材质
Panel material
发纹不锈钢
Hairline stainless steel

无底盒消防盒与锁梯盒 Fireman switch without bottom box and elevator locking box



KL1205H
(配套KL系列) (Supporting KL series)

面板材质 Panel material
抗指纹磨砂不锈钢
Anti-fingerprint frosted stainless steel



KLF425H
(配套KLF系列) (Supporting KLF series)

面板材质 Panel material
发纹不锈钢
Hairline stainless steel

残疾人操纵箱(有偿选配) Operation panel for disabled (Charged optional)



面板材质
Panel material
发纹不锈钢
Hairline stainless steel

可选按钮
Button optional



KL386CD KL388CD KL386-1CD
KL388-1CD KL386-2CD KL388-2CD

无底盒召唤指示器 Calling indicator without bottom box

KL1202-1H
有偿选配
Charged optional



KL1202-2H
有偿选配
Charged optional

面板材质
Panel material
抗指纹磨砂不锈钢
Anti-fingerprint frosted stainless steel

KLF421H
有偿选配
Charged optional



KLF422H
有偿选配
Charged optional

KLF423H
有偿选配
Charged optional



KLF424H
有偿选配
Charged optional

面板材质
Panel material
发纹不锈钢
Hairline stainless steel

有底盒层站横式指示器(无到站灯)有偿选配

Horizontal indicator for landing with bottom box (without arrival lamp) Charged optional



面板材质(发纹不锈钢) Panel material (Hairline stainless steel)

KL341H



KL342H

面板材质(镜面不锈钢) Panel material (Mirror stainless steel)

KL351H **KL352H**



显示屏可选尺寸 Optional screen size

7" 8.0" 10.4"

面板材质(发纹不锈钢) Panel material (Hairline stainless steel)

KL343H **KL344H-A** **KL345H**

面板材质(镜面不锈钢) Panel material (Mirror stainless steel)

KL353H **KL354H-A** **KL355H**

有底盒层站横式指示器(带到站灯)有偿选配

Horizontal indicator for landing with bottom box (with arrival lamp) Charged optional



KL365H 面板材质(发纹不锈钢) Panel material (Hairline stainless steel)

KL375H 面板材质(镜面不锈钢) Panel material (Mirror stainless steel)



KL366H 面板材质(发纹不锈钢) Panel material (Hairline stainless steel)

KL376H 面板材质(镜面不锈钢) Panel material (Mirror stainless steel)

有底盒层站到站灯(有偿选配) Arrival lamps for landing with bottom box (Charged optional)



KL361H 发纹不锈钢 Hairline stainless steel

KL371H 镜面不锈钢 Mirror stainless steel



KL362H 发纹不锈钢 Hairline stainless steel

KL372H 镜面不锈钢 Mirror stainless steel



KL363H 发纹不锈钢 Hairline stainless steel

KL373H 镜面不锈钢 Mirror stainless steel




KL364H 发纹不锈钢 Hairline stainless steel

KL374H 镜面不锈钢 Mirror stainless steel


扶手(可选) Handrail (optional)


KL-FS 001


发纹不锈钢单管
Staninless steel hairline mono-tube


KL-FS 002

镜面钛金不锈钢单管
Titanium gold mirror staninless steel mono-tube


KL-FS 003


发纹不锈钢双管
Staninless steel hairline double-tube


KL-FS 004

镜面钛金不锈钢双管
Titanium gold mirror staninless steel double-tube


KL-FS 005


发纹不锈钢三联管
Staninless steel hairline tri-tube


KL-FS 006

镜面钛金不锈钢三联管
Titanium gold mirror staninless steel tri-tube


KL-FS 007


发纹板方扶手
Hairline plate, square handrail


KL-FS 008


钛金板方扶手
Titanium gold plate, square handrail


KL-FS 009


不锈钢短纹，圆弧头
Short grain stanless steel, arc head


KL-FS 010

钛金不锈钢短纹，圆弧头
Short grain titanium gold stanless steel, arc head


KL-FS 011

不锈钢，钛金组合
Combination of stanless steel and titanium gold


KL-FS 012

圆木和钛金组合
Combination of round wood and titanium gold


吊顶 Ceiling




KL/DD-1005
发纹不锈钢
标配 Standard



KL/DD-1004
发纹不锈钢
选配 Optional



KL/DD-2008
发纹不锈钢
选配 Optional



KL/DD-4004
喷粉钢板，中撑小圆孔，LED光源
Dusting steel plate, hole on center support, LED light source



KL/DD-4005
喷粉钢板，亚克力，LED光源
Dusting steel plate, acrylic, LED light source



KL/DD-4006
喷粉钢板，亚克力，LED光源
Dusting steel plate, acrylic, LED light source



KL-D 001
双拱形白色有机透光板，
中部LED灯的柔光照明设计
Double arched white organin light emitting board plus the gentle light illumination of the mid down light

厅门 Landing Door



KL-TM 001 标配 Standard
厅门：发纹不锈钢
Landing Door: Hairline stainless steel
门套：发纹不锈钢
Jamb: Hairline stainless steel



KL-TM 002 标配 Standard
厅门：喷粉钢板
Landing Door: Dusting steel plate
门套：喷粉钢板
Jamb: Dusting steel plate



KL/M-4013 可选 Optional
厅门：蚀刻不锈钢
Landing Door: Etched stainless steel
门套：发纹不锈钢
Jamb: Hairline stainless steel



KL/M-4033 可选 Optional
厅门：镜面，浮雕，钛黑
Landing Door: Mirror, Relief, Titanium black stainless steel
门套：镜面不锈钢
Jamb: Mirror stainless steel

蚀刻花纹(可选) Etching pattern (optional)


KL/ST-4001


KL/ST -4002


KL/ST-4003


KL/ST-4004


KL/ST-4005


KL/ST-4008


KL/ST-4012

喷粉色标(可选) Dusting color standard (optional)

KL-SK 001
冰灰 Ice gray

KL-SK 002
飞机灰 Plane gray

KL-SK 003
米黄 Corny yellow

KL-SK 004
卵石灰 Pebble gray

KL-SK 005
群青蓝 Ultramarine blue


KL-SK 006
崧蓝蓝色 Pastel blue

KL-SK 007
浅绿色 Light green

KL-SK 008
淡粉红色 Light pink

PVC地板(可选) PVC Floor (optional)



KL/JD-2004


KL/JD-4004


KL/JD-4005


KL/JD-4006


KL-JD 001


KL-JD 002


KL/JD-3167


KL-JD 005


KL-JD 006


KL-JD 007

KL-JD 008

KL-JD 009

先进功能设计 Advanced functional design


● 标准；◎ 无偿选配；○ 有偿选配
● Standard ◎ Free optional ○ Charged optional

●	**抱闸力检测** Braking Force Self-Detecting	主动定期测试抱闸力，通过提示故障及禁止电梯运行等方式，防止严重事故发生。 Actively and regularly test the brake force; prevent more serious accident by means of malfunction indication and running prohibition and so on.
●	**曳引绳滑动检测** Traction Rope Slide Detection	实时监测滑动数据并且根据需要自动进入应急减速的安全运行模式。 It provides real-time monitoring of sliding data, and can automatically enter the safe operation mode for emergency according to requirements.
●	**抱闸检测保护** Brake detection protection	通过抱闸臂检测开关对抱闸的打开与闭合实时监测。当抱闸未按要求打开时，系统将禁止电梯启动。 Brake arm detection switch executes real-time monitor to brake opening / closing. If the brake does not open by the requirements, the system will not start the elevator.
●	**门区外不能开门的保护** Protection of none door opening outside door zone	在非门区状态，禁止自动开门。 Automatic door opening is forbidden under none door zone condition.
●	**低速保护** Low-speed protection	为防止电梯在控制范围外低速运行导致安全问题而设置的保护。 It prevents elevator from low-speed running outside the control range causing any safety problem(s).
●	**超载保护** Overload protection	在电梯关门运行前，当检测到超载信号时，电梯不能关门运行，并且关门按钮无效。超载消除后自动恢复正常。 Before the elevator shuts the door, if it detects overload signal, the elevator does not shut then, "door-shut button" becomes effective. After it removes overload problem, it re-starts automatically.
●	**故障自动靠站** Automatic parking in trouble	正常运行中的电梯因故障在非平层区域内停止时，只要不是安全装置动作而引起，则电梯以低速向中间楼层方向进行自救运行，并在最近服务层停层开门，以防止困人事故的发生。 When the elevator stops in none leveling zone due to any trouble, if it is not caused by safety device action, it executes self-rescue running towards the middle floor direction at low speed. It parks and opens the door at the nearest service floor to prevent from any trapping accident.
●	**电梯受阻保护** Protection of elevator blockage	系统发出起动命令，但在预定的时间内未能正常起动，或电梯在运行，但在预定的时间内未能到达一定的距离，电梯停止运行。 When the system runs start command, it does not start within preset time nor because it is during the elevator travelling, and it does not reach certain distance within preset time as well, the elevator stops accordingly.
●	**有司机运行** Attendant running	电梯工作在司机状态，系统按轿内指令信号运行。如有层站召唤信号，顺向层站召唤自动截车。平层停车后自动开门，但不自动关门，需由司机按动关门按钮。 When it is under the operator condition, the elevator system operates according to the car command signal. If landing call signal is available, it automatically cuts as per forward landing call. The door opens automatically after the leveling parking. But it does not shut automatically until the operator presses "door closing button".
●	**消防返回** Fire-fighting return	消防开关闭合后系统进入消防返回状态：系统将消除所有层站召唤和轿内指令信号，自动返回消防基站，保持开门。如电梯正在反方向运行，则就近层停车不开门返回消防基站，保持开门。 When the fire-fighting switch closes, the system enters into fire-fighting running. The system will remove all the landing calls and car command signals, and it automatically returns to fire-fighting home landing, and the door keeps open. If the elevator is travelling in reverse direction, it parks at nearby floor, and returns to fire-fighting home landing with the door keeping closed, after that it keeps the door open.
○	**消防运行** Fire-fighting running	消防开关闭合后系统进入消防运行：系统将消除所有层站召唤和轿内指令信号，自动返回消防基站，保持开门。如电梯正在反方向运行，则就近层停车不开门返回消防基站，保持开门并由消防员控制运行。 When the fire-fighting switch closes, the system enters into fire-fighting running. The system will remove all the landing calls and car command signals, and it automatically returns to fire-fighting home landing, and the door keeps open. If the elevator is travelling in reverse direction, it parks at nearby floor, and returns to fire-fighting home
●	**基站锁梯** Home landing elevator locking	电梯处于自动状态，关闭基站锁梯开关后，电梯将所登记的轿内指令服务完毕后自动返回基站，电梯进入驻停状态。一旦打开锁梯开关，电梯会立即退出驻停状态，投入正常运行。 When the elevator is under automatic condition, when it shuts home landing locking switch, the elevator will complete all the registered car command services, automatically return to home landing, it enters into parking condition. As soon as locking switch is on, it immediately returns from parking condition and goes into normal running.


● 标准；◎ 无偿选配；○ 有偿选配
● Standard ◎ Free optional ○ Charged optional

●	**误登记取消** Cancel the error-register	若乘客误按了某层轿内指令按钮并已登记（轿内指令灯亮），则在电梯未运行状态下，只需再按一次该层轿内指令按钮即将该登记取消（轿内指令灯灭）。 If the passenger presses the car command button at certain floor and has registered it by mistake, (by then the car indicating lamp is bright), if under the condition of none elevator running, you only press the car command button at the same floor to cancel the register. (By then the car indicating lamp dies out.)
○	**轿厢到站钟** Car arrival gong	通过轿厢顶的钟声，提醒在轿厢内的乘客和等候在电梯候梯厅内的乘客该电梯即将到站。 Arrival gong on top of the car reminds the passengers in the car and those waiting in the hall that the elevator has arrived.
○	**语音报站** Phonic station reporter	由语音报站装置通知乘客电梯运行相关信息：在电梯到站前播报将要到站的层楼，在关门运行前播报将要运行的方向等。 Phonic station reporter informs the passengers of the relevant elevator running information. It announces the arriving landing, the traveling direction etc. before door-close and running.
●	**通电自动开门** Electrified automatic door-opening	每次电梯上电，如轿厢正在门区，电梯门将自动打开。 Every time when the elevator is electrified, if the car is in the door zone, the elevator door opens automatically.
◎	**自动返基站** Automatic return to home landing	无司机运行时，如果自动返基站功能设置有效，当无层站召唤信号时间到达预定的时间后，电梯自动返回基站。 In non-attendant running, if automatic return function to home landing is still effective, and no-landing call signal time fulfills preset time, the elevator returns to home landing automatically.
●	**轿厢内照明及风扇自动停止** Automatic stop of the car illumination and fan	如一定时间电梯无人使用，轿厢内照明和风扇将自动关闭。接到任何层站召唤命令后自动打开。 If nobody uses the elevator within certain period of time, the car illumination and fan shut off automatically and re-opens on receiving any landing call command(s).
●	**楼层信号自动校正** Automatic correction of floor signal	如果楼层显示位置有误差，系统在运行中检测到端站开关后，将自动校正楼层显示。 If the floor display position has error, after the system detects terminal switch in the travel, it will automatically correct the floor display.
●	**轿内反向指令消除** Cancellation of the reverse command(s) in the car	当电梯运行至最远端楼层换速时，清除所有的轿内指令登记。 When the elevator travels to the farthest floor and changes the speed, it removes all the car command register.
●	**呼梯按钮嵌入自诊断** Self-diagnostic embedded call button	若某一层站召唤按钮按下时间超过20秒而未断开，则系统认为该按钮嵌入。以后对该层层站召唤不予登记，且该按钮对应的应答灯不断闪烁报警。当该按钮断开时，退出上述状态。 If you press call button at certain landing for over 20 second, and it still does not disconnect, the system assumes that it is embedded button. It does not register the landing call of the same floor afterwards. Responsive lamp which corresponds to the button keeps flickering and alarming. When the button disconnects, it exits from above condition.
●	**再平层功能** Re-leveling function	电梯停在当前层，当过多乘客进入电梯或离开电梯时，由于钢丝绳的伸长或缩短，轿厢脱离平层区域，电梯将在开门的情况下以低速运行至平层位置。 If the elevator parks on the current floor, when too many passengers enter into / leave the elevator, the car is separated from the leveling zone because of wire rope extension or shortening. The elevator will then travel to the leveling position at low speed under the condition of door-opening.
○	**信号接口装置** Signal interface position	通过信号接口装置输出电梯的基本运行状态信号。 It outputs basic running condition signal through the signal interface device.
○	**自动应急平层运行** Automatic emergency leveling travel	如果自动应急平层功能设置有效，并配置了“自动应急平层装置”，满足自动应急平层条件，电网停电后由电梯自动应急平层装置供电运行到达最近层站的平层位置，开门，让乘客安全撤离轿厢。 If automatic emergency leveling function setting is effective, it is equipped with “automatic emergency leveling device” to satisfy automatic emergency leveling conditions. After power grid fails, automatic emergency leveling device supplies electricity and the elevator travels to the leveling position of the nearest landing. It opens the door, for safe evacuation of the passengers from the car.
○	**远程监控** Remote Monitoring	通过信号接口装置、及无线网络技术，用户只需登入相应服务器即可查看信息，对电梯故障率、故障时间等进行统计分析也可实现故障短信报警。 Through signal interface device and wireless network technology, user can log in the corresponding server to check information, make statistical analysis of elevator failure rate and failure time, and achieve fault message alarm.
○	**能量回馈** Energy feedback	当配置了能量回馈装置时，将电梯轻载上行和重载下行时产生的能量回馈电网或供周边设备使用，以达到节能目的。 When energy feedback device is installed, the energy produced during the elevator light-load up-motion and heavy-load down-motion will be used by power grid and the surrounding equipments. It fulfills the energy-saving purposes.


土建参数
Construction parameters

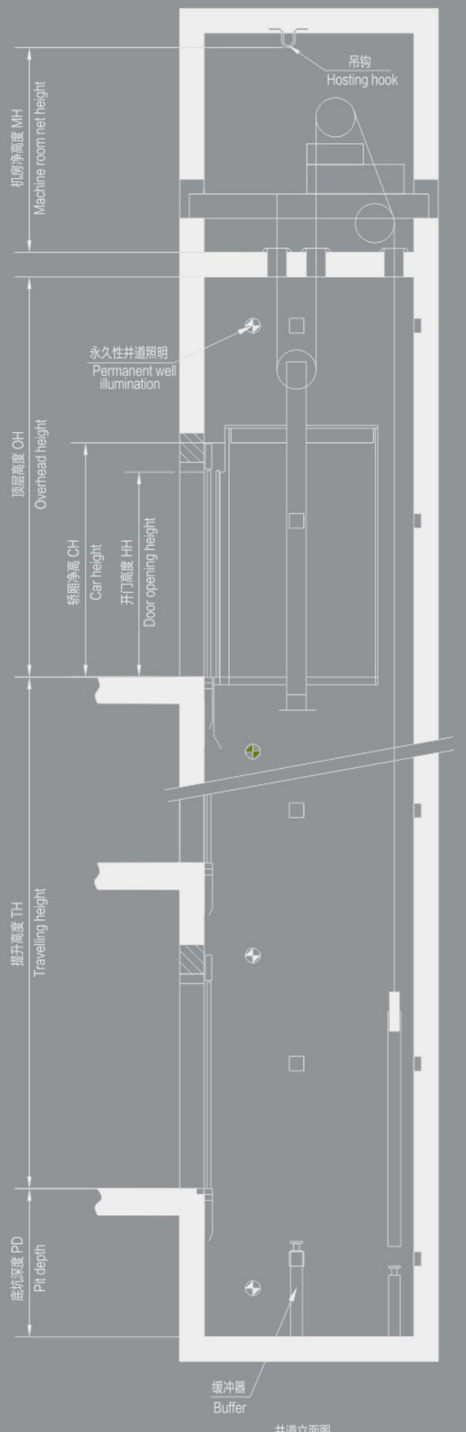

井道立面图
Hoistway section

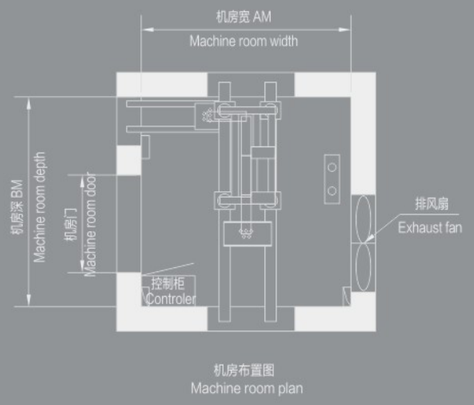

机房布置图
Machine room plan

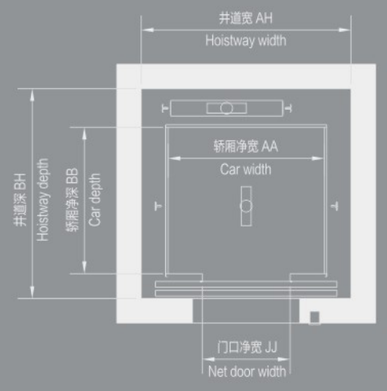


井道布置图
Hoistway plan


对重后置乘客电梯KLK1参数表(银燕系列)
Counterweight Rear Type Passenger Elevator KLK1(Silver Swallow Series)

载重量 (Kg) Loading capacity	额定速度 (m/s) Rated speed	开门宽度 (mm) Door opening width	开门高度 (mm) Door opening height	轿厢尺寸(mm) Car size 宽 Width	深 Depth	高 Height	井道尺寸(mm) Hoistway size 宽 Width	深 Depth	机房尺寸(mm) Machine room size 宽 Width	深 Depth	顶层高度 (mm) Top floor height	底坑深度 (mm) Pit depth	最大提升高度 (m) Max.travelling height
450	1.0	800	2100	1100	1100	2300	1900	1750	1900	1750	4150	1400	50
	1.6	800	2100	1100	1100	2300	1900	1750	1900	1750	4200	1400	60
630	1.0	800	2100	1400	1100	2400	1950	1750	1950	1750	4150	1400	50
	1.6	800	2100	1400	1100	2400	1950	1750	1950	1750	4200	1400	80
	1.75	800	2100	1400	1100	2400	1950	1750	1950	1750	4250	1450	95
800	1.0	800	2100	1400	1350	2400	1950	2000	1950	2000	4150	1400	50
	1.6	800	2100	1400	1350	2400	1950	2000	1950	2000	4200	1400	80
	1.75	800	2100	1400	1350	2400	1950	2000	1950	2000	4250	1450	90
		800	2100	1400	1350	2400	1950	2000	1950	2000	4550	1450	105/120
	2.0	800	2100	1400	1350	2400	1950	2000	1950	2000	4650	1600	80/105/120
	2.5	800	2100	1400	1350	2400	1950	2000	1950	2000	5000	1800	105/120
		800	2100	1400	1350	2400	1950	2000	1950	2000	5000	1800	150
1000	1.0	900	2100	1600	1400	2400	2150	2050	2150	2050	4150	1400	50
	1.6	900	2100	1600	1400	2400	2150	2050	2150	2050	4200	1400	80
	1.75	900	2100	1600	1400	2400	2150	2050	2150	2050	4250	1450	90
		900	2100	1600	1400	2400	2150	2050	2150	2050	4550	1450	105/120
	2.0	900	2100	1600	1400	2400	2150	2050	2150	2050	4650	1600	80/105/120
	2.5	900	2100	1600	1400	2400	2150	2050	2150	2050	5000	1800	105/120
		900	2100	1600	1400	2400	2150	2050	2150	2050	5000	1800	150
1050	1.0	900	2100	1600	1500	2400	2150	2150	2150	2150	4150	1400	50
	1.6	900	2100	1600	1500	2400	2150	2150	2150	2150	4200	1400	80
	1.75	900	2100	1600	1500	2400	2150	2150	2150	2150	4250	1450	90
		900	2100	1600	1500	2400	2150	2150	2150	2150	4550	1450	105/120
	2.0	900	2100	1600	1500	2400	2150	2150	2150	2150	4650	1600	80/105/120
	2.5	900	2100	1600	1500	2400	2150	2150	2150	2150	5000	1800	105/120
		900	2100	1600	1500	2400	2150	2150	2150	2150	5000	1800	150
1150	1.0	1100	2100	1800	1400	2400	2400	2050	2400	2050	4600	1600	50
	1.6	1100	2100	1800	1400	2400	2400	2050	2400	2050	4650	1650	80
	1.75	1100	2100	1800	1400	2400	2400	2050	2400	2050	4700	1700	90/105/120
	2.0	1100	2100	1800	1400	2400	2400	2050	2400	2050	4800	1750	80/105/120
	2.5	1100	2100	1800	1400	2400	2400	2050	2400	2050	5100	1950	120
		1100	2100	1800	1400	2400	2400	2050	2400	2050	5100	2200	150
1250	1.0	1100	2100	1950	1400	2400	2550	2050	2550	2050	4600	1600	50
	1.6	1100	2100	1950	1400	2400	2550	2050	2550	2050	4650	1650	80
	1.75	1100	2100	1950	1400	2400	2550	2050	2550	2050	4700	1700	90/120
	2.0	1100	2100	1950	1400	2400	2550	2050	2550	2050	4800	1750	80/120
	2.5	1100	2100	1950	1400	2400	2550	2050	2550	2050	5100	1950	120
		1100	2100	1950	1400	2400	2550	2050	2550	2050	5100	2200	150
1350	1.0	1100	2100	1950	1500	2400	2550	2150	2550	2150	4600	1600	50
	1.6	1100	2100	1950	1500	2400	2550	2150	2550	2150	4650	1650	80
	1.75	1100	2100	1950	1500	2400	2550	2150	2550	2150	4700	1700	90/120
	2.0	1100	2100	1950	1500	2400	2550	2150	2550	2150	4800	1750	80/120
	2.5	1100	2100	1950	1500	2400	2550	2150	2550	2150	5100	1950	120
		1100	2100	1950	1500	2400	2550	2150	2550	2150	5100	2200	150
1600	1.0	1100	2100	1950	1750	2400	2550	2400	2550	2400	4600	1600	50
	1.6	1100	2100	1950	1750	2400	2550	2400	2550	2400	4650	1650	80
	1.75	1100	2100	1950	1750	2400	2550	2400	2550	2400	4700	1700	90/120
	2.0	1100	2100	1950	1750	2400	2550	2400	2550	2400	4800	1750	80/120
	2.5	1100	2100	1950	1750	2400	2550	2400	2550	2400	5100	1950	120
		1100	2100	1950	1750	2400	2550	2400	2550	2400	5100	2200	150


土建参数
Construction parameters

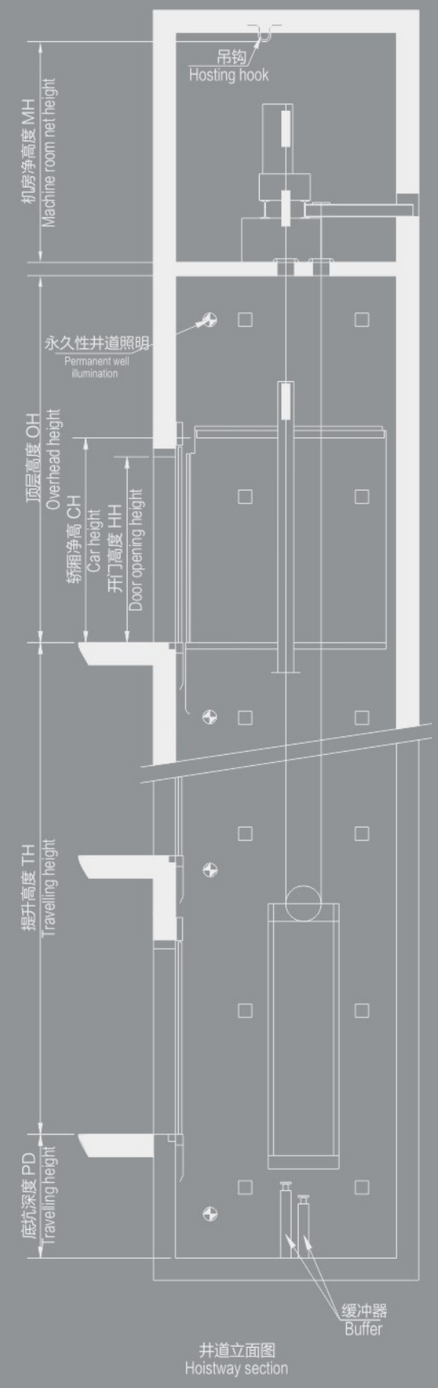

井道立面图
Hoistway section

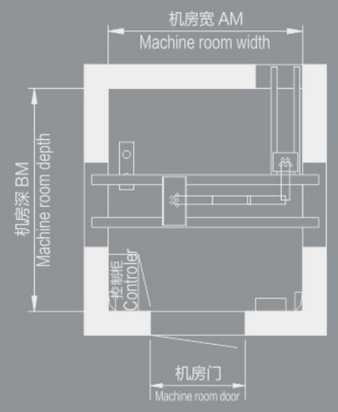

机房布置图
Machine room plan

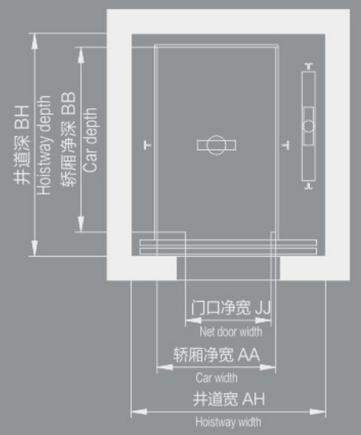

井道布置图
Hoistway plan

对重侧置乘客电梯KLK1参数表（银燕系列）
Counterweight Side Type Passenger Elevator KLK1(Silver Swallow Series)

载重量 (Kg) Loading capacity	额定速度 (m/s) Rated speed	开门宽度 (mm) Door opening width	开门高度 (mm) Door opening height	轿厢尺寸(mm) Car size 宽 Width	深 Depth	高 Height	井道尺寸(mm) Hoistway size 宽 Width	深 Depth	机房尺寸(mm) Machine room size 宽 Width	深 Depth	顶层高度 (mm) Top floor height	底坑深度 (mm) Pit depth	最大提升高度 (m) Max.travelling height
630	1.0	800	2100	1100	1400	2400	1950/1900	1850/1900	1950/1900	1850/1900	4150	1400	50
	1.6	800	2100	1100	1400	2400	1950/1900	1850/1900	1950/1900	1850/1900	4200	1400	60
	1.75	800	2100	1100	1400	2400	1950/1900	1850/1900	1950/1900	1850/1900	4250	1450	90/95
800	1.0	800	2100	1100	1700	2400	1950/1900	2100/2150	1950/1900	2100/2150	4150	1400	50
	1.6	800	2100	1100	1700	2400	1950/1900	2100/2150	1950/1900	2100/2150	4200	1400	80
	1.75	800	2100	1100	1700	2400	1950/1900	2100/2150	1950/1900	2100/2150	4250	1450	90
		800	2100	1100	1700	2400	1950/1900	2100/2150	1950/1900	2100/2150	4350	1450	105/120
	2.0	800	2100	1100	1700	2400	1950/1900	2100/2150	1950/1900	2100/2150	4450	1600	80/105/120
	2.5	800	2100	1100	1700	2400	2000/1950	2100/2150	2000/1950	2100/2150	5000	1800	105/120
		800	2100	1100	1700	2400	2000/1950	2100/2150	2000/1950	2100/2150	5000	1800	150
1000	1.0	900	2100	1250	1850	2400	2050	2250/2300	2050	2250/2300	4150	1400	50
	1.6	900	2100	1250	1850	2400	2050	2250/2300	2050	2250/2300	4200	1400	80
	1.75	900	2100	1250	1850	2400	2050	2250/2300	2050	2250/2300	4250	1450	90
		900	2100	1250	1850	2400	2050	2250/2300	2050	2250/2300	4350	1450	105/120
	2.0	900	2100	1250	1850	2400	2050	2250/2300	2050	2250/2300	4450	1600	80/105/120
	2.5	900	2100	1250	1850	2400	2100	2250/2300	2100	2250/2300	5000	1800	105/120
		900	2100	1250	1850	2400	2100	2250/2300	2100	2250/2300	5000	1800	150
1050	1.0	900	2100	1250	1950	2400	2050	2350/2400	2050	2350/2400	4150	1400	50
	1.6	900	2100	1250	1950	2400	2050	2350/2400	2050	2350/2400	4200	1400	80
	1.75	900	2100	1250	1850	2400	2050	2250/2300	2050	2250/2300	4250	1450	90
		900	2100	1250	1950	2400	2050	2350/2400	2050	2350/2400	4350	1450	105/120
	2.0	900	2100	1250	1950	2400	2050	2350/2400	2050	2350/2400	4450	1600	80/105/120
	2.5	900	2100	1250	1950	2400	2100	2350/2400	2100	2350/2400	5000	1800	105/120
		900	2100	1250	1950	2400	2100	2350/2400	2100	2350/2400	5000	1800	150
1150	1.0	1000/1100	2100	1200	2100	2400	2200/2100	2500/2550	2200/2100	2500/2550	4250	1700	50
	1.6	1000/1100	2100	1200	2100	2400	2200/2100	2500/2550	2200/2100	2500/2550	4350	1700	80
	1.75	1000/1100	2100	1200	2100	2400	2200/2100	2500/2550	2200/2100	2500/2550	4500	1750	90/105/120
	2.0	1000/1100	2100	1200	2100	2400	2200/2100	2500/2550	2200/2100	2500/2550	4700	1800	80/105/120
	2.5	1000/1100	2100	1200	2100	2400	2250/2150	2500/2550	2250/2150	2500/2550	5100	1950	120
		1000/1100	2100	1200	2100	2400	2250/2150	2500/2550	2250/2150	2500/2550	5100	2200	150
1250	1.0	1000/1100	2100	1300	2100	2400	2300/2200	2500/2550	2300/2200	2500/2550	4250	1700	50
	1.6	1000/1100	2100	1300	2100	2400	2300/2200	2500/2550	2300/2200	2500/2550	4350	1700	80
	1.75	1000/1100	2100	1300	2100	2400	2300/2200	2500/2550	2300/2200	2500/2550	4500	1750	90/120
	2.0	1000/1100	2100	1300	2100	2400	2300/2200	2500/2550	2300/2200	2500/2550	4700	1800	80/120
	2.5	1000/1100	2100	1300	2100	2400	2350/2250	2500/2550	2350/2250	2500/2550	5100	1950	120
		1000/1100	2100	1300	2100	2400	2350/2250	2500/2550	2350/2250	2500/2550	5100	2200	150
1350	1.0	1100/1200	2100	1400	2100	2400	2400/2300	2500/2550	2400/2300	2500/2550	4250	1700	50
	1.6	1100/1200	2100	1400	2100	2400	2400/2300	2500/2550	2400/2300	2500/2550	4350	1700	80
	1.75	1100/1200	2100	1400	2100	2400	2400/2300	2500/2550	2400/2300	2500/2550	4500	1750	90/120
	2.0	1100/1200	2100	1400	2100	2400	2400/2300	2500/2550	2400/2300	2500/2550	4700	1800	80/120
	2.5	1100/1200	2100	1400	2100	2400	2450/2350	2500/2550	2450/2350	2500/2550	5100	1950	120
		1100/1200	2100	1400	2100	2400	2450/2350	2500/2550	2450/2350	2500/2550	5100	2200	150
1600	1.0	1100/1200	2100	1600	2100	2400	2550/2500	2500/2550	2550/2500	2500/2550	4250	1700	50
	1.6	1100/1200	2100	1600	2100	2400	2550/2500	2500/2550	2550/2500	2500/2550	4350	1700	80
	1.75	1100/1200	2100	1600	2100	2400	2550/2500	2500/2550	2550/2500	2500/2550	4500	1750	90/120
	2.0	1100/1200	2100	1600	2100	2400	2550/2500	2500/2550	2550/2500	2500/2550	4700	1800	80/120
（中分式）	2.5	1100	2100	1600	2100	2400	2600	2500	2600	2500	5100	1950	120/150
备注		中分式/ 旁开式 Center opening /side opening				轿厢净高（不含吊顶） Height of the elevator car	中分式/ 旁开式 Center opening /Side opening		中分式/ 旁开式 Center opening /Side opening				

对重侧置贯通门系列乘客电梯KLK1参数表(银燕系列)

Counterweight Side Opposite Door Type Passenger Elevator KLK1(Silver Swallow Series)

载重量 (Kg) Loading capacity	额定速度 (m/s) Rated speed	开门宽度 (mm) Door opening width	开门高度 (mm) Door opening height	轿厢尺寸(mm) Car size 宽 Width	深 Depth	高 Height	井道尺寸(mm) Hoistway size 宽 Width	深 Depth	机房尺寸(mm) Machine room size 宽 Width	深 Depth	顶层高度 (mm) Top floor height	底坑深度 (mm) Pit depth	最大提升高度 (m) Max.travelling height
630	1.0	800	2100	1100	1400	2400	1950/1900	1910/2052	1950/1900	1910/2052	4150	1400	50
	1.6	800	2100	1100	1400	2400	1950/1900	1910/2052	1950/1900	1910/2052	4200	1400	60
	1.75	800	2100	1100	1400	2400	1950/1900	1910/2052	1950/1900	1910/2052	4250	1450	90/95
800	1.0	800	2100	1100	1700	2400	1950/1900	2210/2352	1950/1900	2210/2352	4150	1400	50
	1.6	800	2100	1100	1700	2400	1950/1900	2210/2352	1950/1900	2210/2352	4200	1400	80
	1.75	800	2100	1100	1700	2400	1950/1900	2210/2352	1950/1900	2210/2352	4250	1450	90
		800	2100	1100	1700	2400	1950/1900	2210/2352	1950/1900	2210/2352	4350	1450	105/120
	2.0	800	2100	1100	1700	2400	1950/1900	2210/2352	1950/1900	2210/2352	4450	1600	80/105/120
	2.5	800	2100	1100	1700	2400	2000/1950	2210/2350	2000/1950	2210/2350	5000	1800	105/120
		800	2100	1100	1700	2400	2000/1950	2210/2350	2000/1950	2210/2350	5000	1800	150
1000	1.0	900	2100	1250	1850	2400	2050	2360/2502	2050	2360/2502	4150	1400	50
	1.6	900	2100	1250	1850	2400	2050	2360/2502	2050	2360/2502	4200	1400	80
	1.75	900	2100	1250	1850	2400	2050	2360/2502	2050	2360/2502	4250	1450	90
		900	2100	1250	1850	2400	2050	2360/2502	2050	2360/2502	4350	1450	105/120
	2.0	900	2100	1250	1850	2400	2050	2360/2502	2050	2360/2502	4450	1600	80/105/120
	2.5	900	2100	1250	1850	2400	2100	2360/2500	2100	2360/2500	5000	1800	105/120
		900	2100	1250	1850	2400	2100	2360/2500	2100	2360/2500	5000	1800	150
1050	1.0	900	2100	1250	1950	2400	2050	2460/2602	2050	2460/2602	4150	1400	50
	1.6	900	2100	1250	1950	2400	2050	2460/2602	2050	2460/2602	4200	1400	80
	1.75	900	2100	1250	1950	2400	2050	2460/2602	2050	2460/2602	4250	1450	90
		900	2100	1250	1950	2400	2050	2460/2602	2050	2460/2602	4350	1450	105/120
	2.0	900	2100	1250	1950	2400	2050	2460/2602	2050	2460/2602	4450	1600	80/105/120
	2.5	900	2100	1250	1950	2400	2100	2460/2600	2100	2460/2600	5000	1800	105/120
		900	2100	1250	1950	2400	2100	2460/2600	2100	2460/2600	5000	1800	150
1150	1.0	1000/1100	2100	1200	2100	2400	2200/2100	2610/2750	2200/2100	2610/2750	4250	1700	50
	1.6	1000/1100	2100	1200	2100	2400	2200/2100	2610/2750	2200/2100	2610/2750	4350	1700	80
	1.75	1000/1100	2100	1200	2100	2400	2200/2100	2610/2750	2200/2100	2610/2750	4500	1750	90/105/120
	2.0	1000/1100	2100	1200	2100	2400	2200/2100	2610/2750	2200/2100	2610/2750	4700	1800	80/105/120
	2.5	1000/1100	2100	1200	2100	2400	2250/2150	2610/2750	2250/2150	2610/2750	5100	1950	120
		1000/1100	2100	1200	2100	2400	2250/2150	2610/2750	2250/2150	2610/2750	5100	2200	150
1250	1.0	1000/1100	2100	1300	2100	2400	2300/2200	2610/2750	2300/2200	2610/2750	4250	1700	50
	1.6	1000/1100	2100	1300	2100	2400	2300/2200	2610/2750	2300/2200	2610/2750	4350	1700	80
	1.75	1000/1100	2100	1300	2100	2400	2300/2200	2610/2750	2300/2200	2610/2750	4500	1750	90/120
	2.0	1000/1100	2100	1300	2100	2400	2300/2200	2610/2750	2300/2200	2610/2750	4700	1800	80/120
	2.5	1000/1100	2100	1300	2100	2400	2350/2250	2610/2750	2350/2250	2610/2750	5100	1950	120
		1000/1100	2100	1300	2100	2400	2350/2250	2610/2750	2350/2250	2610/2750	5100	2200	150
1350	1.0	1100/1200	2100	1400	2100	2400	2400/2300	2610/2750	2400/2300	2610/2750	4250	1700	50
	1.6	1100/1200	2100	1400	2100	2400	2400/2300	2610/2750	2400/2300	2610/2750	4350	1700	80
	1.75	1100/1200	2100	1400	2100	2400	2400/2300	2610/2750	2400/2300	2610/2750	4500	1750	90/120
	2.0	1100/1200	2100	1400	2100	2400	2400/2300	2610/2750	2400/2300	2610/2750	4700	1800	80/120
	2.5	1100/1200	2100	1400	2100	2400	2450/2350	2610/2750	2450/2350	2610/2750	5100	1950	120
		1100/1200	2100	1400	2100	2400	2450/2350	2610/2750	2450/2350	2610/2750	5100	2200	150
1600	1.0	1100/1200	2100	1600	2100	2400	2550/2500	2610/2750	2550/2500	2610/2750	4250	1700	50
	1.6	1100/1200	2100	1600	2100	2400	2550/2500	2610/2750	2550/2500	2610/2750	4350	1700	80
	1.75	1100/1200	2100	1600	2100	2400	2550/2500	2610/2750	2550/2500	2610/2750	4500	1750	90/120
	2.0	1100/1200	2100	1600	2100	2400	2550/2500	2610/2750	2550/2500	2610/2750	4700	1800	80/120
备注	中分贯通 旁开贯通 Center opening opposite door /side opening opposite door					轿厢净高 (不含吊顶) Height of the elevator car	中分贯通 / 旁开贯通 Center opening opposite door /side opening opposite door		中分贯通 / 旁开贯通 Center opening opposite door /side opening opposite door				



用户应完成的工作

1、本图按有关电梯技术标准要求绘制，需复核后作为电梯安装依据。

2、机房内通向井道的所有孔洞四周应筑一高50mm以上，宽度适当的台阶。

3、曳引机承重梁如需埋入墙内，则支承长度应超过墙中心20mm，且不应小于75mm。

4、安装完成后，地面装饰应与厅门地坎上表面有一高度适当的台阶，以防止水或其它杂物进入井道。

5、安装时浇灌的物体应能满足相关图示要求。

The user's tasks

1. It makes the drawing according to the relevant lift technical standard, It needs to be checked and confirmed by the user before it becomes the lift installation proof.
2. It shall have one above 50mm step with the proper width around the holes that lead to the well in side the machine room.
3. It shall be embedded in the wall for the machine supporting beam of the traction machine, Then the supporting length shall be 20mm more than the wall center, It shall not be less than 75mm.
4. After the installation completion, the ground decoration shall have a proper height step in the sill surface to prevent water or other impurity from entering into the well.
5. The casting object in the installation shall satisfy the relevant drawing requirements.